

IDEAL
FOR
MULTIPLE
DEVICES

SAGEMCOM


F@ST PACK MULTI

Powerline Communication device
for multiple connections network

- 500 mbps
- 3 x Ethernet ports
- Compatible with Internet gateways
- Secured communication
- Easy to set up



F@ST PACK MULTI

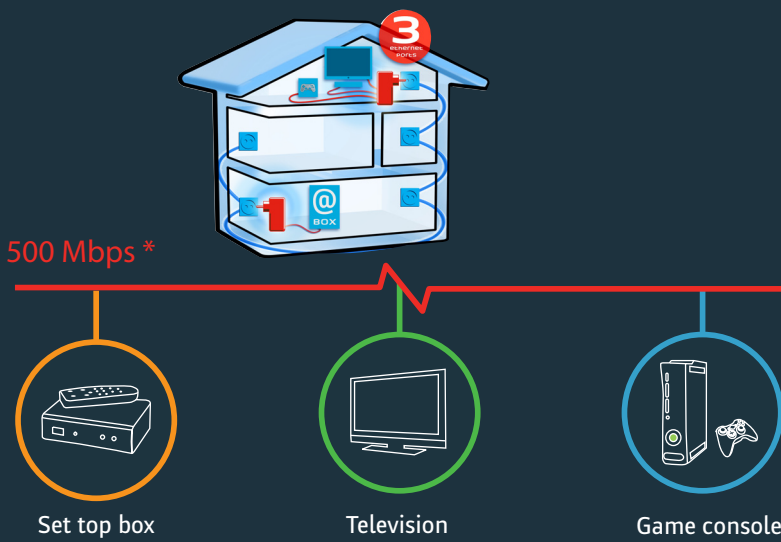

APPLICATIONS

- High speed broadband sharing
- Video distribution : HD & SD
- Audio and video streaming and internet downloading
- Printer and peripheral sharing
- Network and interactive online gaming
- IP Television distribution
- PC files and applications sharing

MAIN FEATURES

- 500 Mbps data transmission rate*
- Additional socket with integrated noise filter
- 3 x Ethernet Ports
- Quality of Service management
- 128-bit AES Link Encryption with key management
- Power management

*Maximum throughput based on theoretical transmission PHY rate

STANDARDS COMPLIANCE

- HomePlug AV
- IEEE 1901
- Eup regulation 1275/2008
- Auto MDI / MDI-X

COEXISTENCE & COMPATIBILITY

- Co-existence with HomePlug® 1.0 devices : 14Mbps & 85Mbps
- Compatible with HomePlug AV® devices : 200 Mbps

BOX CONTENT

- 1 x F@ST PLUG 501
- 1 x F@ST PLUG 503P
- 2 x White Ethernet Cables with RJ45 connectors
- 1 x Quick Start Guide

POWER & CONSUMPTION

- Power : 100-240V AC 50-60Hz
- F@ST PLUG 501
 - Maximum consumption : below 2,5W
 - Idle Consumption : below 0,5W
- F@ST PLUG 503P
 - Maximum consumption : below 3,5W
 - Idle Consumption : below 1,0W

HARDWARE

F@ST PLUG 501

- AR7420 Chipset
- 1 x Male Power Plug type E+F or Type G
- 1 x Button Press Encryption with key management
- 1 x Power activity multicolor LED
- 1 x Powerline activity multicolor LED
- 1 x Ethernet Link Activity multicolor LED
- 1 x RJ45 Ethernet Socket (Auto MDI/MDI-X)
- Dimensions (mm) : 70 x 60 x 28
- Weight : 79g



F@ST PLUG 503P

- AR7420 Chipset
- 1 x Female Power Socket Type E or Type F or Type G
- 1 x Male Power Plug type E, E+F or Type G
- 1 x Button Press Encryption with key management
- 1 x Power activity LED
- 1 x Powerline activity multicolor LED
- 3 x Ethernet Link Activity LEDs
- 3 x RJ45 Ethernet Sockets (Auto MDI/MDI-X)
- Dimensions (mm) : 120 x 75 x 43
- Weight : 234g



TEMPERATURE & ENVIRONMENT

- Operating Temperature : 0°C to 45°C
- Max Relative Humidity : 90%

All rights reserved.

The information and specifications included are subject to change without prior notice. Sagemcom Broadband tries to ensure that all information in this document is correct, but does not accept liability for error or omission. Non contractual document. All trademarks are registered by their respective owners. Simplified joint stock company - Capital 35.703.000 Euros - 518 250 360 RCS Nanterre. 09/2012

Sagemcom Broadband SAS

Headquarters : 250, route de l'Empereur
92848 Rueil-Malmaison Cedex - FRANCE

Tel : +33 (0)1 57 61 10 00 - Fax : +33 (0)1 57 61 10 01

www.sagemcom.com

SAGEMCOM